

HINGES

FITTING INSTRUCTIONS: Fixing Hole References

Fixing Hole Centre Reference Chart - STERLING® Hinges


SPT - Sterling Top Hung

SPS - Sterling Side Hung

Dimensions

Description	A	B	C	D	E	F	G	H	I
SPT10	40.8	-	-	165.1	-	177.8	-	218.2	256.2
SPT12	65.0	-	-	190.1	-	212.7	-	269.0	307.3
SPT16/SPT16W	118.4	-	-	241.2	215.7	304.0	-	370.6	408.9
SPTH16	118.4	-	-	241.2	133.7	222.0	-	370.6	408.9
SPT22	65.0	-	203.2	317.4	251.3	418.3	-	523.0	561.3
SPT22W	80.0	-	235.8	350.0	-	295.4	-	526.5	564.8
SPT26	65.0	189.0	314.4	383.9	161.4	292.4	584.5	638.5	676.8
SPS10	34.0	-	-	165.1	-	177.8	-	218.2	-
SPSH16	65.0	-	-	241.2	-	212.9	-	370.6	-

Note: Above hole fixings also apply for BX (Offset) variants.

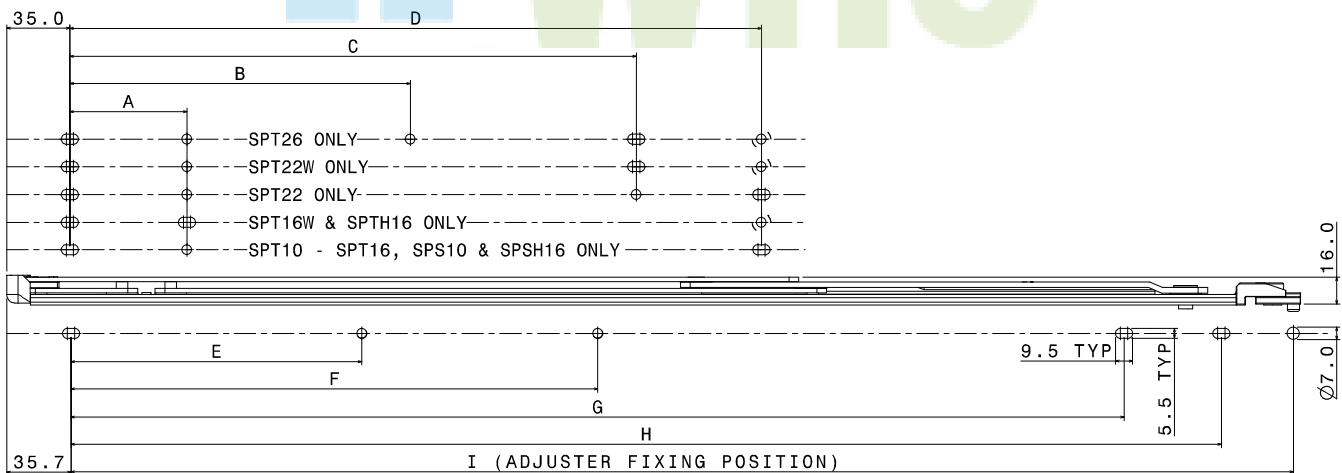

Not to Scale, All dimensions in mm

It is the responsibility of the user to ensure that this document is at the latest issue.

Due to our policy of continual product improvement we reserve the right to alter specifications without notice.

It is the responsibility of the window manufacturer to ensure that the finished window meets the required performance and safety specification.



Securistyle Ltd.
 Kingsmead Industrial Estate
 Princess Elizabeth Way, Cheltenham,
 Gloucestershire, GL51 7RE
 Tel: +44 (0) 1242 221200
 Fax: +44 (0) 1242 520828
 Web: www.securistyle.co.uk